

ANGLE BROOM

Available widths 60", 72", 84" & 96"

Direct drive Eaton® motor and exclusive self-centering swing linkage system for optimal sweeping.




EATON
Char-Lynn

Standard with 32" diameter poly/wire wafers; all poly wafers also available.

15-25 GPM
RECOMMENDED FLOW RATE

MANUAL OR HYDRAULIC
ANGLE OPTIONS AVAILABLE


GREATER THAN
1500 LB
LOADER OPERATING CAPACITY

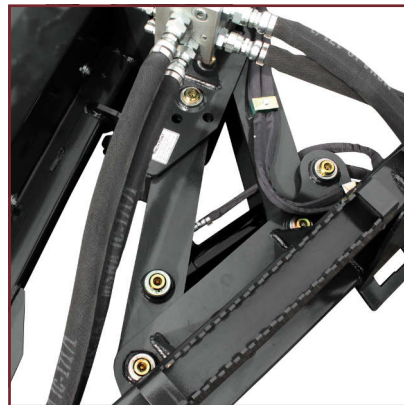

**OPTION:
HYDRAULIC ANGLE**
Angle the broom using
in cab controls.
Hydraulic Angle
requires electric control.



**OPTION:
DEFLECTOR**
Bolts onto broom and
covers an additional
30 degrees to limit
flying debris.

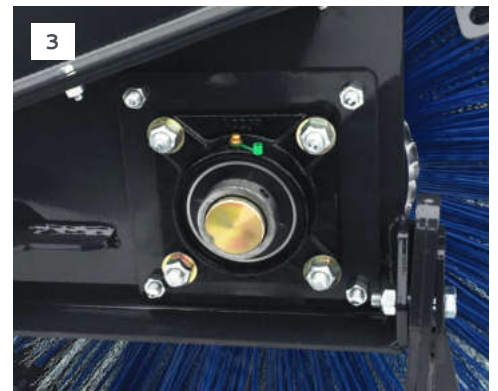

1. SWING LINKAGE SYSTEM SELF-CENTERS BROOM WHEN ANGLED

2. RECESSED & GUARDED MOTOR

3. OVERSIZED 2" GREASEABLE BEARING

4. REPLACE WAFERS EASILY WITHOUT DISCONNECTING HOSES. STANDARD WITH POLY/WIRE WAFERS.

5. STANDS FLIP DOWN TO PROTECT BRISTLES DURING STORAGE

	MODEL	VAB60	VAB72	VAB84	VAB96
Sweeping Width, Straight (Inches)		60.0	72.0	84.0	96.0
Sweeping Width, Full Angle (Inches)		53.5	64.2	74.8	85.5
Overall Width (Inches)		69.1	81.1	93.1	105.1
Overall Width, Full Angle (Inches)		73.4	83.9	94.3	105.4
Overall Height/Depth, Straight (Inches)		34.0 / 74.0			
Broom Angle (Degrees)		27			
Number of 32 Inch Diameter Wafers		29	35	41	47
Recommended Flow Rate (GPM)		15-25 Standard Flow Only			
Approximate Weight (Pounds)		970	1035	1095	1160
Recommended Loader Capacity		Greater than 1500 pounds			