

FEED PUSHER



- > Five width adjustments keeps feed away from tires.
- > Eight angle adjustments keeps feed moving efficiently.
- > 1 1/2" x 10" reversible, replaceable rubber edge allows 6" of total wear.


MODEL	FPV				
Overall Width, Straight (Inches)	96.0				
Overall Height (Inches)	20.0				
Width Adjustment Position	1	2	3	4	5
Angle: Min / Max (Degrees)	38.4 / 58.2	40.9 / 61.6	43.0 / 65.0	44.6 / 68.3	45.6 / 71.7
Push Width: Min / Max (Inches)	50.5 / 75.2	45.6 / 72.5	40.5 / 70.2	35.4 / 68.3	30.1 / 67.2
Discharge Distance: Min / Max (Inches) (Measured from Center Line of Loader)	48.7 / 49.5	51.3 / 53.9	53.3 / 58.1	54.6 / 62.1	55.3 / 66.0
Approximate Weight (Pounds)	520				

RUBBER MANURE SCRAPER

72" · 84" · 96"



- > Deep-angled design and one-piece lower rubber eliminates spillage.
- > 1 1/2" x 10" reversible, replaceable rubber edges allow 6" of total wear.
- > Upper pull back cleans material in tight spaces.
- > Has been effectively used as a snow pusher for small skid steer loaders and compact tractors.

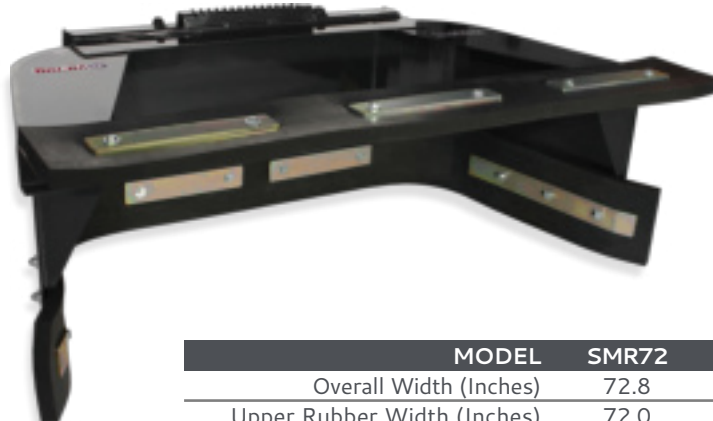

MODEL	SMR72	SMR84	SMR96
Overall Width (Inches)	72.8	84.8	96.8
Upper Rubber Width (Inches)	72.0	84.0	96.0
Overall Height (Inches)	25.0		
Depth, Overall / Inner (Inches)	52.2 / 35.3		
Approximate Weight (Pounds)	670	725	785