


V60 INDUSTRIAL ROTARY CUTTER

Available widths 72", 78" & 84"

Cuts up to 8" diameter trees. Top of the line cutter with more blades, heavier flywheel and industrial grade components to handle the most demanding jobs.

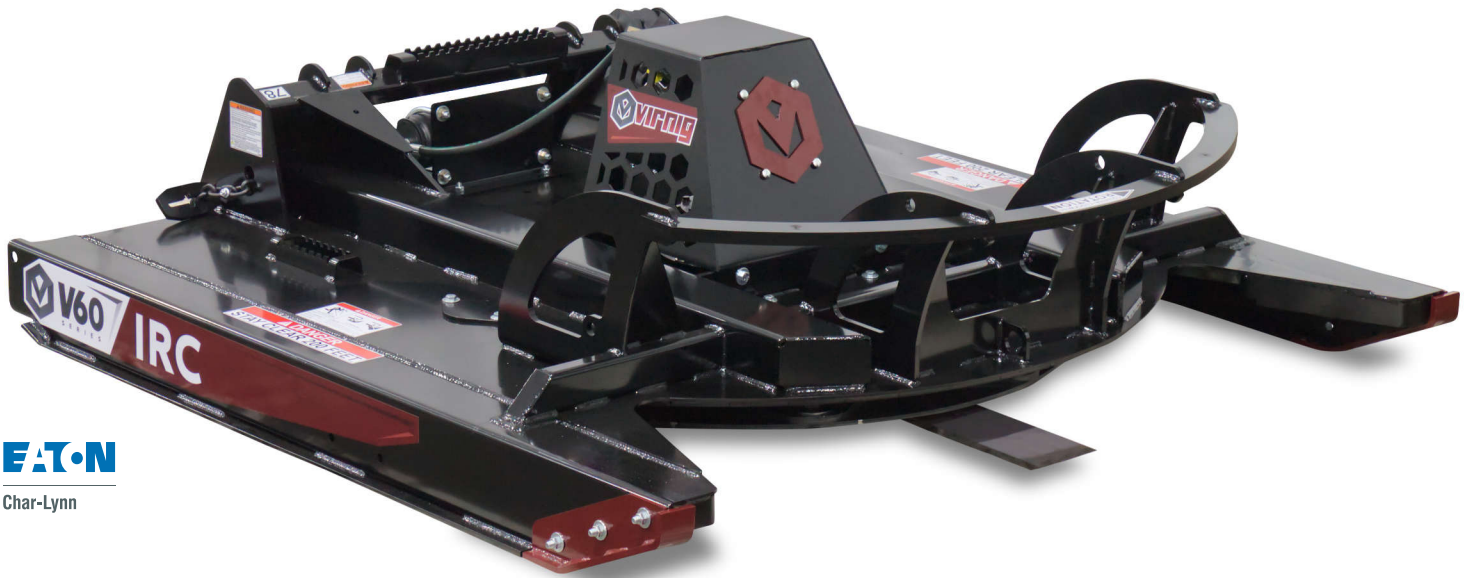

Char-Lynn

Do not operate rotary brush cutter without a shatterproof cab door on loader.

8.0"
CUT CAPACITY

72" - 84"
THREE CUT
WIDTHS

20-45 GPM
FOUR MOTOR OPTIONS
STANDARD & HIGH FLOW

UP TO 610LB
FLYWHEEL
WEIGHT

UP TO 2490LB
OVERALL WEIGHT

DETAIL UNDER DECK
(Shown with Optional Teeth)





1. DIRECT DRIVE EATON® MOTOR WITH RELIEF VALVES



4. CIRCULAR FLYWHEEL WITH 4 DOUBLE-SIDED BLADES BOUNCES OFF STUMPS

2. HYDRAULIC BRAKING STOPS FLYWHEEL WITHIN 10 SECONDS



5. REPLACEABLE FRONT SKID SHOES

3. STANDARD MOTOR GUARD & SPINDLE GUARD

	MODEL	IRC72	IRC78	IRC84
Cut Width (Inches)		72.0	78.0	84.0
Overall Width (Inches)		78.0	84.0	90.0
Overall Height (Inches)			20.1	
Overall Depth (Inches)		80.3	86.3	92.3
Deck Height (Inches)			8.3	
Push Bar Height (Inches)			23.4	
Minimum Cut Height (Inches)			2.3	
Cutting Capacity, Diameter (Inches)			8.0	
Deck Thickness: Top / Side (Inches)			0.25*	
Recommended Flow Rate (GPM)		20 – 25 Standard Flow, 25 – 45 High Flow		
Approximate Weight (Pounds)		2120**	2280**	2420**
Recommended Loader Capacity		Greater than 2200 pounds		
Number of Teeth (Optional)		20	24	28

*Material is Grade 50 Plate (50,000 PSI Minimum Yield Strength).
 **High Flow Motor Options Add Approximately 70 Pounds to Model Weight.