

## V30 CT ANGLE SNOW BLADE

Universal skid steer mount only

Available widths 60" & 72"



OPTION:  
POLY EDGE



OPTION:  
QUICK TACH  
SHOES  
Helps keep the  
blade level.


OPTION:  
1-CYLINDER  
& 2-CYLINDER  
HYDRAULIC  
ANGLE  
AVAILABLE

MANUAL &  
HYDRAULIC  
ANGLE AVAILABLE

21.0"  
BLADE  
HEIGHT

385-410 LB  
OVERALL WEIGHT  
(VARIES BY MODEL)

LESS THAN  
1000 LB  
LOADER OPERATING CAPACITY

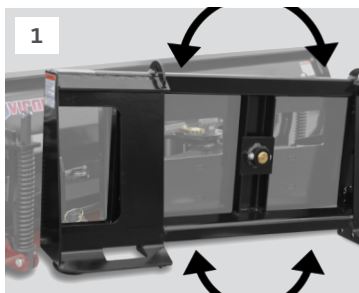

1. 4° SIDE-TO-SIDE OSCILLATION FOLLOWS UNEVEN SURFACES



2. ANGLE THE BLADE 28° LEFT OR RIGHT



3. TRIP EDGE PROTECTS OPERATOR & EQUIPMENT



4. 5/8" x 6" REVERSIBLE STEEL BOLT-ON EDGE ALLOWS 3 1/2" OF WEAR

MODEL	SBS60-CT	SBS72-CT
Width: Overall, Straight / Full Angle (In)	61.0 / 53.8	73.0 / 64.4
Overall Height (Inches)	21.0	
Overall Depth, Straight (Inches)	28.5	
Blade Angle (Degrees)	(+/-) 28	
Moldboard Thickness (Inches)	0.12	
Cutting Edge (Inches)	5/8 x 6 Bolt-on	
Blade Oscillation (Degrees)	(+/-) 4	
Cylinder Bore / Stroke (Inches)	2.0 / 6.0	
Cylinder Pins / Hinge Pins Diameter (In)	1.0 / 1.25	
Approximate Weight (Pounds)	385*	410*
Recommended Loader Capacity	Less than 1000 pounds	

\*Weight with steel edge installed.