

V50 CLOSED FRONT ROTARY BRUSH CUTTER

Available widths 60", 66", 72" & 78"

Cuts up to 4" diameter trees and clears grass and brush for a consistent finished look.



EAT·N
Char-Lynn

Do not operate rotary brush cutter without a shatterproof cab door on loader.

<p>4.0" CUT CAPACITY</p>	<p>60" - 78" FOUR CUT WIDTHS</p>	<p>14-42 GPM FOUR MOTOR OPTIONS STANDARD & HIGH FLOW</p>	<p>UP TO 225LB FLYWHEEL WEIGHT</p>	<p>UP TO 1610LB OVERALL WEIGHT</p>
-------------------------------------	---	---	---	---

DETAIL UNDER DECK



OPTION: REAR ROLLER
Compacts chopped material and produces a better cut by limiting gouging and scalping.




OPTION: SWIVEL CASTERS
360° rotating swivel casters produce a better cut by creating a smoother ride and limiting gouging and scalping.



1. DIRECT DRIVE EATON® MOTOR WITH RELIEF VALVES

2. HYDRAULIC BRAKING STOPS FLYWHEEL WITHIN 10 SECONDS

3. STANDARD MOTOR GUARD & SPINDLE GUARD

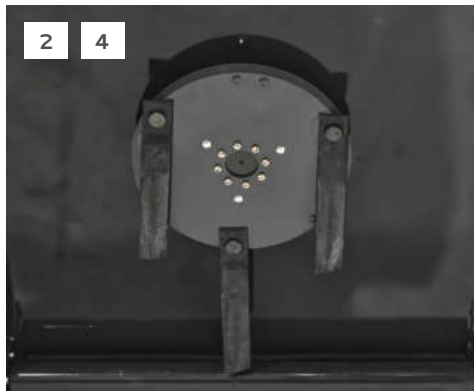

4. CIRCULAR FLYWHEEL WITH 3 UPDRAFT BLADES BOUNCES OFF STUMPS

5. CHAIN CURTAIN PREVENTS FLYING DEBRIS

6. REPLACEABLE FRONT SKID SHOES



	MODEL	RBV60	RBV66	RBV72	RBV78
Cut Width (Inches)		60.0	66.0	72.0	78.0
Overall Width (Inches)		66.0	72.0	78.0	84.0
Overall Height (Inches)				20.9	
Overall Depth (Inches)		81.8	87.8	93.8	99.8
Deck Height (Inches)				8.8	
Minimum Cut Height (Inches)				1.8	
Cutting Capacity, Diameter (Inches)				4.0	
Deck Thickness: Top / Side (Inches)				0.25 / 0.25*	
Recommended Flow Rate (GPM)			14 – 25 Standard Flow, 25 – 42 High Flow		
Approximate Weight (Pounds)		1180**	1325**	1435**	1540**
Recommended Loader Capacity			Greater than 1500 Pounds		

*Material is Grade 50 Plate (50,000 PSI Minimum Yield Strength).
 **High Flow Motor Options Add Approximately 70 Pounds to Model Weight.